

Features:

- Clean Dead-front Construction
- Digitally Recorded Automatic Evacuation Message (Up to 4 Minutes of Message Capacity)
- 25 Watt Bullet-Proof Amplifier
- 25 or 70 VRMS Field Selectable
- 120 VAC Power Supply and Battery Charger
- Live Microphone Override of Message and Tone
- Analog Addressable Compatible
- High Reliability, No Maintenance, Fully Supervised
- Easy Installation and Operation
- Studio Quality Voice Recordings
- Built in Alarm and Alert Signals
- Up to 4 Minute Message Capacity
- Works with 12VDC or 24VDC Fire Alarm Panels
- Works with Microprocessor based and Networked Fire Alarm Systems
- 3 Minute Message Restart on Microphone Key
- 24 Hour Backup with two 12V 7AHr Batteries

Description:

The FGVAX 25 operates with any Fire Alarm Control Panel (FACP), and provides 25 Watts of speaker power.

The FGVAX 25 includes all necessary features to provide an effective voice evacuation system. With the addition of zone splitters, remote microphone panels, and expander modules, the FGVAX 25 can be custom configured to satisfy the needs of most applications.

The FGVAX 25 has its own power supply and battery charger. Panel must be wired with 120 VAC and standby batteries connected.

A digital message repeater (DMR) is built into the FGVAX 25. The selection of alarm tone and automatic message repeats, as well as the 6 Hour delay of the AC power failure reporting feature are all field configurable.

The paging microphone is an integral component. Removal of the microphone from the panel will cause a "Trouble" condition which will be reported locally, as well as through the FACP.

The FGVAX 25 is housed in an attractive surface or semi-flush mounted backbox, with a hinged and key locked door.



FGVAX25

Voice Evacuation System



FGVAX 25 shown with Keylocked Door Removed

Listings:



S5661




6911-1446:100

Ordering Information:

| Description | Model Number |
|-----------------------------------------------------------------------------------------------------------------------|--------------|
| 25W Voice Evacuation System, with: Power Supply / Battery Charger Paging Microphone Digital Message Repeater | FGVAX 25 |
| 25W Voice Evacuation System, with: 4 Speaker Zones | FGVAX 25/4Z |
| 25W Voice Evacuation System, with: 8 Speaker Zones | FGVAX 25/8Z |



Typical Installation:

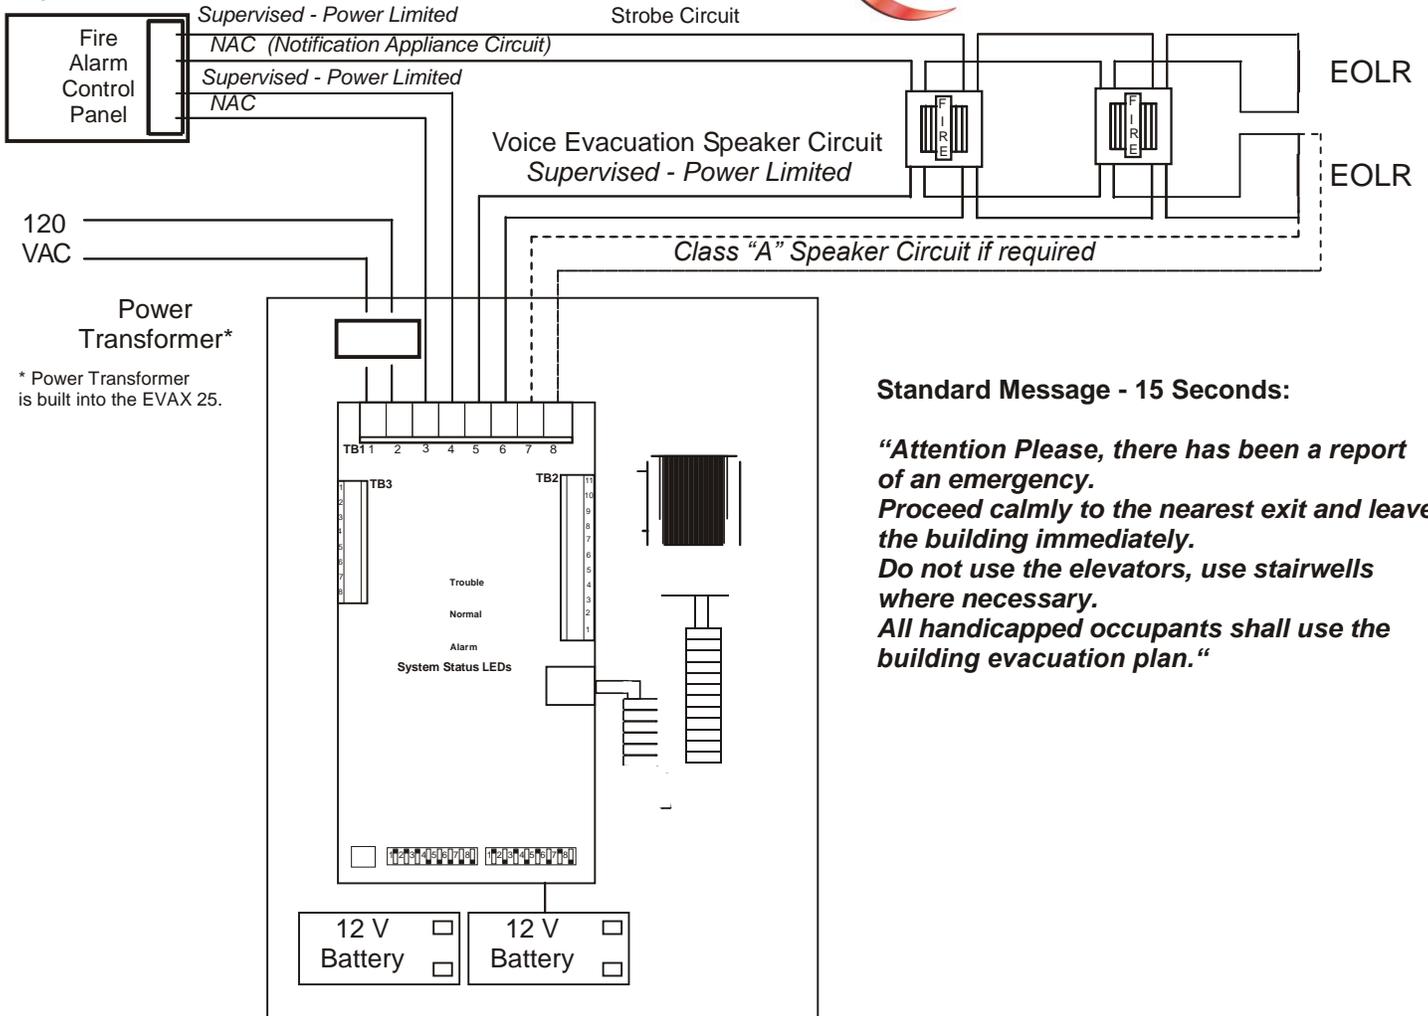

* Power Transformer is built into the EVAX 25.

Standard Message - 15 Seconds:

“Attention Please, there has been a report of an emergency. Proceed calmly to the nearest exit and leave the building immediately. Do not use the elevators, use stairwells where necessary. All handicapped occupants shall use the building evacuation plan.”

Technical Characteristics:

| | |
|-----------------------|------------------------------------------------|
| Primary Power: | 120VAC @ 0.8A |
| 24 VDC Battery Power: | 0.18A Standby 1.00A Alarm |
| Output: | 25 Watts @ 25/70 VRMS Tone and Voice |
| Backbox Dim: | 14.5 x 18 x 4" <i>w·h·d</i> |
| Color: | Charcoal Grey·std Red·optional |

Specifications (continued)

25-Watt audio amplifier, tone generator, digital message repeater, 120VAC power supply and battery charger.

The voice evacuation message/signal shall be broadcast until the Fire Alarm Control Panel (FACP) is reset, or until fire emergency personnel interrupt the broadcast with a manual page. On reset system shall automatically return to standby (normal operating) condition.

A secondary message shall be provided which can be triggered by the closure of a contact from either the FACP or from any normally open contact device.

Remote paging microphone(s) will be supported by the system through a supervised circuit. Remote microphone(s) may be mounted up to 5000 feet away from the voice evacuation panel.

Specifications are subject to change without notice. Specifications are provided for information only and no responsibility is assumed by Fireguard Safety Equipment Co Ltd. For their use.

Engineers Specifications:

The voice evacuation system shall be Fireguard Systems Series FGVAX 25 or approved equal.

The voice evacuation system shall provide 25 watts signal power **and** 25 watts voice power, and shall be UL Listed.

The voice evacuation system shall be micro-processor based, and shall contain an integral microphone,